


Key Features

- Floating Unit 665 x 249 x 67 mm (l x w x h)
- For non-contact transport of fragile substrates
- Substrate thickness 0.5 mm \pm 0.2 mm
- Air bearing/vacuum chuck
- Nominal air gap 30 μ m
- Clean room suitable
- Side-by-side placement is possible

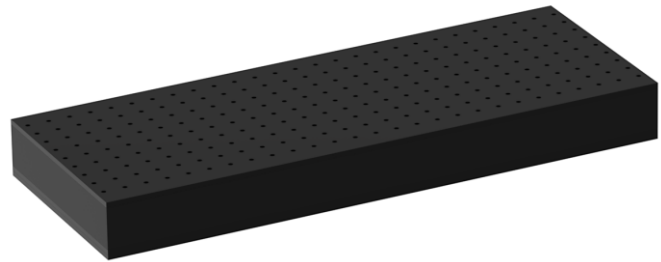

Air Bearing/Vacuum Floating Unit

Concept and Design

Floating Units are the solution for all processes that require non-contact transportation and precise positioning of flat, fragile objects.

Floating units are used for coating glass for screen production. During the coating process, the glass substrate hovers above the Floating Unit at a defined distance of a few μ m from the carrier plate.

This is achieved through the precise arrangement of pressure nozzles and vacuum nozzles. The requirements for precise positioning could not be met by simply creating an air cushion by pressure nozzles that work against the ambient pressure. Only the interaction of positive and negative pressure makes it possible to position the glass substrates so precisely that they can be moved within the narrow focus of a stationary laser.



The body of the Floating Unit is made of black anodized aluminum.

Side-by-side placement of several Floating Units is possible. Deviating sizes are available on request.

The air gap at the edges can be individually controlled by a separate air supply. It is set to 45 μ m, while the PV functionality is retained.

Set Up Procedure

- Connect the Floating Unit (FU) to 4 Tip-Tilt-Units (TTUs), which serve as a leveling unit.
- Set TTUs to the approximate height.
- Position FU on the TTUs.
- Connect to air supply and vacuum.
- Align FU as required, using an auxiliary axis system and/or a digital spirit level.
- Continue setting up the 2nd FU:
Align 2nd FU with reference to 1st FU. Use an auxiliary axis system, a digital spirit level or a steel ruler. For optimum performance, the height offset at the gap between the FUs should be < 5 μ m.
- Continue with the setup of additional FUs as described above.

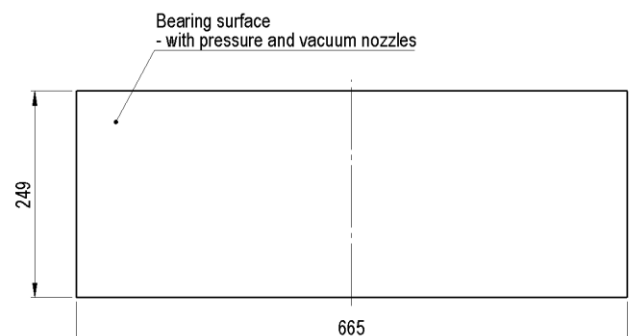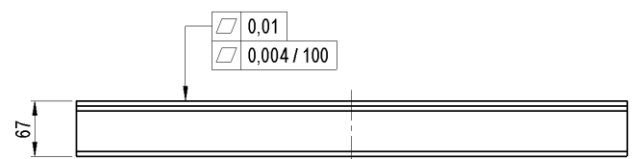

Your BeNeLux Distributor

te lintelo systems bv
photonics. our passion!

www.tlsbv.nl +31 316 340804

CONTACT US

Specifications

Mechanical Data	Unit	Value
Dimension (length x width x height)	mm	665 x 249 x 67
Mass	kg	24
Substrate thickness	mm	0.5 ± 0.2
Nominal air gap	µm	30
Air gap flatness over 100 mm	µm	± 3
Air gap flatness over the whole Floating Unit	µm	± 6
Repeatability of air gap with moving glass, at any reference point on the PV chuck	µm	± 1
Flatness chuck surface	µm	± 7
Supply air pressure	kPa	15
Vacuum	kPa	- 8
Air consumption	Sl/min	60
Vacuum consumption	Sl/min	60
Clean room suitability		suitable
Material		aluminum, black anodized
MTBF	h	> 20000
Requirements on Air Quality	Value	ISO Class
Particle size	≤ 1 µm	DIN ISO 8573-1 - class 2
Pressure dew point	≤ +3 °C	DIN ISO 8573-1 - class 4
Oil content	≤ 0.1 mg/m ³	DIN ISO 8573-1 - class 2

Subject to technical modifications and typographical errors.